



Product Specification

Domestic Range

C

200L Twin Solar

Capacity	Type	Model	Installation
200L	Unvented	Twin Solar	Floor Standing

Descriptive Specification


- The unit is to be floor standing Cyclone pre-insulated pressurised Hot Water Cylinder
- The cylinder is to be manufactured from Duplex LDX 2101.
- The cylinder must be tested to 10 bar with a maximum operating pressure of 5 bar.
- The cylinder should have a standing heat loss of no more than 83 W

Constructive Specifications

Capacity	200L
Cylinder Material	Stainless Steel Duplex LDX 2101
Thermal Insulation	Polyurethane foam CFC-Free and HCFC Free
Casing	Painted Galvanised Carbon Steel DX51D
Coil Material	Stainless Steel Tube AISI 316L
Weight (empty) kg	50
Weight (full) kg	247
Max. Operating Pressure (bar)	5
Test Pressure (bar)	10
Max. Working Temperature (c)	90
Heating Elements	1 No. Incoloy Immersion
Unvented Kit Components	Expansion Vessel, Inlet Control Group, Zone Valve, Cylinder Thermostat, Tundish
Heat Loss (W)	83
Heat up Time (mins)	21
Boiler Coil Surface Area (m ²)	0.58
Boiler Coil kW Rating	16
Solar Coil Surface Area (m ²)	0.67
Solar Coil kW Rating	18
Product Code	CEMVS-0200LFC
Energy Efficiency Class	C

Dimensions

A	1490
B	540
C	196
D	246
E	386
F	486
G	551
H	616
I	756
J	906
K	981
L	1211

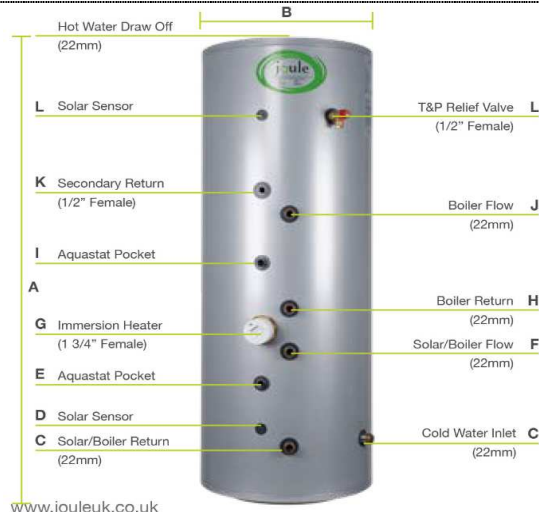

www.jouleuk.co.uk

Unit 17 C&D Power Road, Plantation Business Park, Bromborough, Wirral CH62 3RN, UK
www.jouleuk.co.uk | info@jouleuk.co.uk | Phone +44 1513 551094