
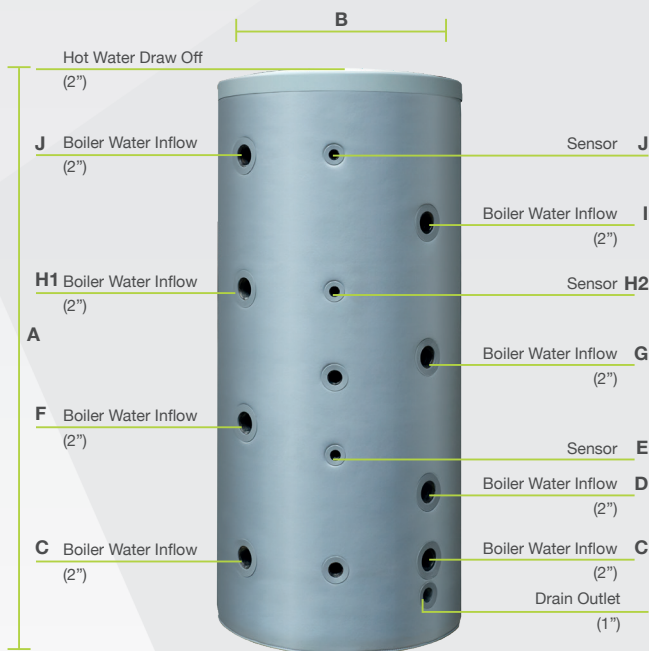


Dimensions (300-2000L)

Dimensions (3000-5000L)

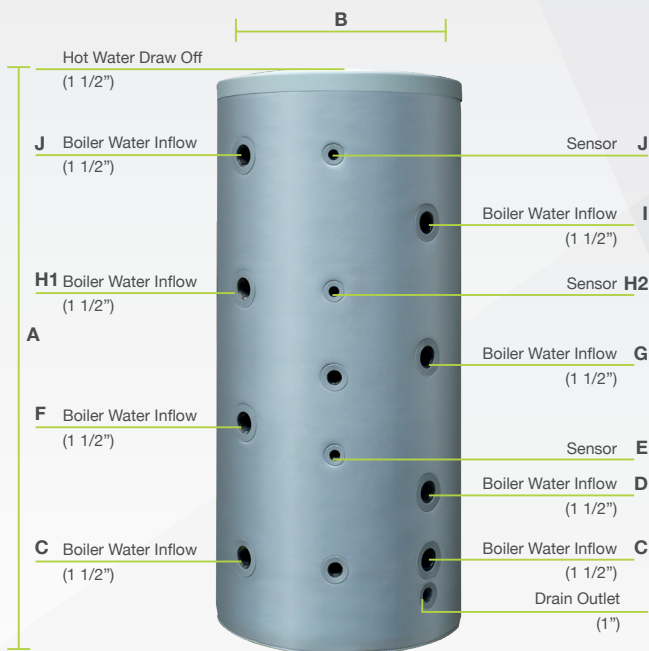

Buffer

Capacity	100L	200L	300L	400L	500L	800L	1000L	1500L	2000L	3000L	4000L	5000L
Code Without Coil	BBMSD-00100NFC	BBMSD-00200NFC	BBMSD-00300NFC	BBMSD-00400NFC	BBMSD-00500NFC	BBMSD-00800NFC	BBMSD-01000NFC	BBMSD-01500NFC	BBMSD-02000NFC	BBMSD-03000NFC	BBMSD-04000NFC	BBMSD-05000NFC
Code With Coil	-	BBMSI-00200NFC	BBMSI-00300NFC	BBMSI-00400NFC	BBMSI-00500NFC	BBMSI-00800NFC	BBMSI-01000NFC	BBMSI-01500NFC	BBMSI-02000NFC	BBMSI-03000NFC	BBMSI-04000NFC	BBMSI-05000NFC
Height (A)	1100	1105	1450	1830	1900	1730	2050	2000	2500	2750	2355	2855
Diameter (B)	550	750	750	750	550	790	790	1100	1100	1250	1600	1600
Weight (empty)	50	60	75	90	105	125	150	210	235	300	380	440
Hot water volume	111	223	305	387	467	728	883	1479	2023	2935	3985	4981
C	220	220	220	220	215	250	250	385	385	410	445	445
D	-	-	390	450	455	435	500	660	660	725	675	760
E	130	315	500	575	610	570	570	485	800	825	790	920
F	-	485	560	680	675	620	740	-	930	1040	910	1075
G	-	555	730	905	915	820	980	1152	1205	1360	1140	1390
H1	-	605	900	1135	1145	1020	1240	960	1480	1680	1365	1705
H2	820	785	900	1135	1145	1020	1240	1122	1480	1680	1365	1705
I	-	785	1070	1365	1375	1215	1485	1535	1755	1995	1605	2020
J	885	885	1235	1580	1605	1410	1730	1435	2025	2310	1840	2335
Energy Efficiency Class	C	C	C	C	C	C	C	C	C	C	C	C
Max Working Pressure	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3
Max Working Temperature	95	95	95	95	95	95	95	95	95	95	95	95